



BACK TO BASICS

505224N

SAMOA SPRING REWIND HOSE REEL - 15M X 19MM ID

- Heavy duty full metal double pedestal construction
- Hose capacity: 15m x 19mm ID
- 1,520psi (105bar) hose pressure rating
- 3/4" (f) inlet thread
- 3/4" (f) outlet thread
- True 3/4" full flow shaft & ports
- Seven position outlet arm
- Full port nickel protected steel shaft
- Large effective radial latching area for easy operation



\$2,510⁰⁰

505232

SAMOA SPRING REWIND HOSE REEL - 20M X 12MM ID

- Dual ball bearing spool support results in very low rotary friction
- Optimised power spring and low friction design ensure smooth & comfortable operation
- Unique non ratch out design enables total mounting flexibility (7 different positions)
- True 3/4" fluid section maximises product delivery
- New design facilitates quicker & easier service and post maintenance reassembly



\$2,530⁰⁰

AR1220CAB

REWINDA COMPRESSED AIR HOSE REEL - 20M X 12MM ID

- 1/2" BSPT(m) inlet/outlet connections
- 1/2" BSPT(f) hose reel inlet thread
- Maximum working pressure of 300 psi (20bar)
- Working temperature of -40°C to +80°C
- Weight of 14kg
- Dimensions of 580mm (L) x 480mm (H) x 270mm (W)



AR1220CAR
as above but red
\$290⁰⁰



\$290⁰⁰

660AN

ALEMLUBE 450G TRIGGER ACTION GREASE GUN

- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1g of grease per stroke
- Unique Twin-Lock System seals the piston and eliminates the possibility of dummy lubrication



660ANQRC
as above but with Quick Release Coupler
\$135⁰⁰

\$108⁰⁰

14512

ALEMLUBE QUICK CONNECT GREASE GUN COUPLER

- Works with all grease gun types - pneumatic, manual and battery
- 1/8" BSP(f) thread
- Maximum working pressure of 10,000psi (690bar)
- 4 hardened spring steel jaws resilient under high pressure
- 90mm long

14511 as above
but 1/8" NPT threaded
\$31⁶⁰



\$30⁷⁰

A14512

ALEMLUBE 1/8" BSP QUICK RELEASE GREASE GUN COUPLER

- Works with all grease gun types - pneumatic, manual and battery
- 1/8" BSP(f) thread
- Maximum working pressure of 10,000psi (690bar)
- Fits all metric and SAE specification grease nipples
- Lock-on and free up both hands to operate your grease gun

A14511 as above
but 1/8" NPT threaded
\$32⁵⁰

\$30⁷⁰



BACK TO BASICS DIESEL FUEL



L10040PA
ALEMLUBE
**100L DIESEL REFUELLING,
STORAGE & DISPENSING KIT**



- Lockable & portable diesel refuelling storage and dispensing kit
- Full security with a lockable lid & recesses for tie down straps
- 100L capacity with forklifting capability
- Maximum flow rate up to 50L per minute
- Dimensions 690mm (W) x 720mm (H) x 570mm (D)



L10040PAM as above but with digital meter
\$1,310⁰⁰

\$1,115⁰⁰

L20040PA
ALEMLUBE
**200L DIESEL REFUELLING,
STORAGE & DISPENSING KIT**



- Lockable & portable diesel refuelling storage and dispensing kit
- Full security with a lockable lid & recesses for tie down straps
- 200L capacity with forklifting capability
- Maximum flow rate up to 50L per minute
- Dimensions 1,000mm (W) x 720mm (H) x 570mm (D)



L20040PAM as above but with digital meter
\$1,385⁰⁰

\$1,195⁰⁰

L45040PA
ALEMLUBE
**450L DIESEL REFUELLING,
STORAGE & DISPENSING KIT**



- Lockable & portable diesel refuelling storage and dispensing kit
- Full security with a lockable lid & recesses for tie down straps
- 450L capacity with forklifting capability
- Maximum flow rate up to 50L per minute
- Dimensions 1,000mm (W) x 885mm (H) x 850mm (D)



L45040PAM as above but with digital meter
\$1,820⁰⁰

\$1,630⁰⁰

L60040PA
ALEMLUBE
**600L DIESEL REFUELLING,
STORAGE & DISPENSING KIT**



- Lockable & portable diesel refuelling storage & dispensing kit
- Full security with a lockable lid & recesses for tie down straps
- 600L capacity with forklifting capability
- Maximum flow rate up to 50L per minute
- Dimensions 1,000mm (W) x 1,110mm (H) x 850mm (D)



L60040PAM as above but with digital meter
\$1,970⁰⁰

\$1,775⁰⁰

L100080PA
ALEMLUBE
**1,000L DIESEL REFUELLING,
STORAGE & DISPENSING KIT**



- Fully portable with a unique user friendly design & a 80L/min automatic shut-off nozzle
- Full security with a lockable lid and recesses for tie down straps
- 1,000L capacity with forklifting capability
- Dimensions 1,700mm (W) x 950mm (H) x 999mm (D)



L120080PA as above but 1200L
\$3,060⁰⁰

\$2,780⁰⁰

52000A
PIUSI
12V DIESEL REFUELLING KIT

- 12V fully portable diesel refuelling kit
- 12V Piusi self priming rotary vane pump
- Auto shut off nozzle with flow rates of up to 50L/min
- 4 metre anti-static delivery hose
- 2 metre battery cable



52000 as above but with manual nozzle
\$435⁰⁰

\$540⁰⁰

F20020N
EL SERIES
12V DIESEL REFUELLING TANK KIT



- Flow rates of up to 50L/min
- Suction capacity of up to 2m
- Duty cycle of 30 minutes on, 30 minutes off
- Equipped with a 12V DC motor and supplied with 3/4" x 4m suction & delivery hose, battery cable with clamps, inlet filter & a manual plastic nozzle
- Compact, completely portable, simple installation & easy to use
- Self priming rotary vane pump



\$310⁰⁰

52004A
PIUSI
**12V HIGH VOLUME DIESEL DRUM PUMP WITH
AUTO SHUT-OFF NOZZLE**

- 1" BSP(f) inlet/outlet
- Flow rates of up to 85L/min
- Heavy duty cast iron housing protects the dual motors & the pump head assembly
- Motor protection fuse prevents motor overload
- Telescopic down tube suits fuel tanks up to 1,000mm deep
- Includes an automatic shut off nozzle
- Self priming vane pump with sintered steel rotor and acetyl resin vanes



\$1,190⁰⁰

52004-3AC
PIUSI
BULK TANK 12V DIESEL TRANSFER PUMP

- Flow rates of up to 85L/min
- Powerful self-priming, rotary vane, positive displacement bi-pump
- 1" BSP(f) flanged connections
- Duty cycle of 30 minutes on/30 minutes off
- Compact sturdy structure



52005-3AC as above but 24V
\$910⁰⁰

\$910⁰⁰

52050
PIUSI
12V DIESEL TRANSFER PUMP WITH SIDE INLET

- Flow rates of up to 50L/min
- Self-priming 12V electric pump with on/off switch
- Sturdy handle for convenient portability
- Duty cycle of 30 mins on/30 mins off
- Maximum working pressure of 22psi (1.5bar)
- 3/4" BSP(f) inlet & outlet connections
- 3/4" ID hose tails
- Power: 300 Watt; 2,900rpm



52040 as above but side inlet
\$455⁰⁰

\$405⁰⁰

52001A
PIUSI
24V DIESEL REFUELLING KIT

- 24V fully portable diesel refuelling kit
- 24V Piusi self priming rotary vane pump
- Auto shut off nozzle with flow rates of up to 50L/min
- 4 metre anti-static delivery hose
- 2 metre battery cable



52001 as above but with manual nozzle
\$585⁰⁰

\$540⁰⁰

51039
ALEMLUBE
AUTO SHUT-OFF DIESEL NOZZLE

- Suitable for applications using an electric diesel transfer pump only
- High flow rate of 120L/min
- Aluminium body with buna-n & viton seals
- Maximum working pressure 50psi (3.5 bar)
- 1" BSP(f) swivel



\$200⁰⁰

51008
ALEMLUBE
1" MECHANICAL DIESEL FUEL METER

- Accurate between flow rates of 20L/min and 120L/min
- Mechanical gear meter accurate to ±1.0%
- Maximum working pressure of 142psi (10bar)
- 1" BSP(f) inlet/outlet ports
- Batch total of 999L displayed with easy to read 18mm high digits
- 3-digit batch display
- Suitable for gravity feed or pump applications
- Repeatability of ±0.2%
- Field calibration possible
- Also suitable for use with kerosene



\$225⁰⁰

51007
PIUSI
**1" MECHANICAL DIESEL FUEL METER -
120L/MIN**

- Accurate between flow rates of 20L/min to 120L/min
- Mechanical gear meter accurate to ±1.0%
- 1" BSP(f) inlet/outlet ports
- 4 digit partial display (maximum 9,999L) with 7 digit totaliser
- Weight 0.6kg
- Suitable for the metering of diesel only



\$225⁰⁰

326000
ALEMLUBE
**240V HIGH VOLUME DIESEL FUEL
TRANSFER PUMP**

- Flow rates of up to 100L/min
- Vane type pump with sintered steel rotor & acetylic resin vanes
- Continuous duty operation
- 1" BSP inlet/outlet
- Thermal motor overload protection
- Sturdy cast iron construction
- Suitable for the transfer of diesel fuel



\$1,055⁰⁰

732000
PIUSI
240V DIESEL FUEL TRANSFER PUMP

- Vane type pump with sintered steel rotor & acetylic resin vanes, flow rates of up to 72L/min
- Continuous duty operation
- Built in 100 micron filter is easily accessible
- 1" BSP(f) inlet/outlet
- Cast iron, paint finished pump housing is weather resistant
- Ideal for diesel fuel transfer out of bulk tanks where 240V power is available



\$585⁰⁰

407010N2
PIUSI
INLINE DIESEL METER

- Inline digital turbine type diesel meter
- Aluminium body with polypropylene turbine
- LCD display can be rotated to 4 positions
- 5 digit partial display with 6 digit total
- Accurate flow rates of 7L to 120L/min
- Bi-directional flow option
- Field calibration possible
- 1" BSP(f) inlet and outlet ports
- Maximum pressure 300psi (21bar)
- Flow rate analysis function
- Uses 2 x AAA batteries



\$450⁰⁰

51039M
ALEMLUBE
**AUTO SHUT-OFF METERED DIESEL
FUEL NOZZLE**

- Maximum flow rate of 120L/min
- For dispensing diesel & kerosene
- LCD display with 5 digit resettable total & automatic shut-off when a tank is full
- 7 digit cumulative total
- Suitable for use with electric diesel pumps working within a pressure range from 10 to 50psi
- 1" BSP(f) swivel inlet & 24mm (1") outlet spout
- Digital meter powered by 2 x 1.5V alkaline batteries



\$460⁰⁰



*Applies to the majority of Alemlube products unless otherwise stated.

www.alemlube.com.au

BACK TO BASICS GREASING



424150 SAMOA 20KG GREASE KIT WITH TROLLEY

- High pressure 55:1 ratio pump
- Up to 7,950psi (548bar) grease pressure
- Cast alloy dual-cylinder air motor
- Built in filter protects against pump tube contamination
- Ideal for busy workshops where greasing is undertaken all day, every day
- Heavy duty air motor is free of external plastic components
- Drum not included



\$1,020⁰⁰

424170 SAMOA 20KG GREASE KIT


- Supplied complete with 4m of grease hose
- Robust, heavy duty construction for extreme conditions
- 55:1 ratio air motor develops grease pressures of up to 7,950psi (548bar)
- Delivers up to 0.9kg per minute
- 70mm diameter air motor with 35mm stroke
- Handles high density, tacky greases up to NLGI2



\$875⁰⁰

531010 SAMOA 180KG GREASE TRANSFER PUMP

- 10:1 ratio double acting grease pump
- Maximum free flow of 34kg/min
- Develops grease pressures of up to 1,000psi (70bar)
- ½" BSP(f) air inlet, 1" BSP(f) grease outlet
- Continuous duty flow rates of up to 10kg/min at (60-70 cpm)
- Total pump height of 1,427mm (pump tube height of 925mm)
- Air motor effective diameter of 115mm
- Air motor stroke of 100mm
- Quality components ensure a long service life
- Weight of 20 kg

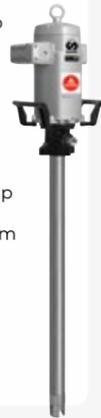

\$7,080⁰⁰

532130 SAMOA 12:1 RATIO BULK GREASE TRANSFER PUMP

- Double acting air operated 12:1 ratio transfer pump
- Flow rates of up to 40kg/min
- Maximum oil pressure of 1,215psi (84bar)
- ½" BSP(f) air inlet
- ¾" BSP(f) fluid outlet
- Quiet operation with a noise level reading of 80 dB
- 6" (150mm) air motor
- Hardened foot valve with filter prevents pumptube contamination and failure
- Handles up to NLGI3 grease



\$5,995⁰⁰

G100120 EL SERIES 20KG GREASE KIT

- Effortless greasing
- Heavy duty grease control valve
- 4m long hose assembly
- Affordable and robust
- Maximum fluid pressure of 5,800psi (400bar)
- All types of grease up to NLGI2
- Delivers up to 600g/min
- Tested to up to 24,000kg
- Air consumption of 3.6cfm at 150psi
- Air inlet pressure from 70psi (5bar) to 150psi (10bar)
- Noise level of 82dB



\$630⁰⁰

KPL-24EX ALEMLUBE 24V 20KG GREASE KIT

- Suitable for grease up to NLGI2
- Working pressure of 4,000psi (276bar)
- Dispenses up to 70-80g/min
- Suitable for working temperatures of -10°C to +40°C
- Can be used with a hose reel inclusive of up to 15m of hose
- A unique product, this 24V, 20kg grease pump kit is ideal for mining & heavy industrial applications
- Continuous operation



\$6,060⁰⁰

680AN ALEMLUBE AIR OPERATED 450G GREASE GUN

- Develops grease pressures of up to 3,290psi (226bar)
- Pressure ratio of 40:1
- Delivers up to 182g per minute
- Recommended maximum air pressure of up to 98psi (6bar)
- Suits 450g cartridge or bulk grease
- Continuous flow or single shot operation
- Suitable for use with grease up to NLGI2
- Flexible extension length of 50cm
- Weight of 1.4kg
- Manufactured in Germany



\$310⁰⁰

409200 SAMOA 55:1 RATIO 180KG GREASE PUMP

- Samoa PM3 Series 55:1 ratio air operated grease pump
- Maximum 7,700psi air pressure
- For 180kg grease drums
- Suitable for 180kg drums
- Suitable for light to heavy grease types
- Delivers 0.6kg per minute
- Heavy duty air motor is free of external plastic parts
- Internal filter eliminates the chance of pumptube contamination



\$995⁰⁰

428262 SAMOA 180KG AIR OPERATED GREASE KIT

- 55:1 ratio grease pump develops up to 7,950psi (548bar)
- Integral filter eliminates the chance of pumptube contamination
- Lightweight ergonomic, cast alloy, grease control valve included
- Grease control valve has single shot or continuous flow option
- Ideal for busy workshops where greasing is undertaken all day, every day
- 180kg drum not included



\$1,885⁰⁰

530610 SAMOA PM35 HEAVY DUTY 60:1 RATIO 180KG GREASE PUMP

- Continuous duty flow rates of up to 900g/min
- Maximum free flow rates of up to 2kg/min
- Maximum outlet pressure of 8,700psi (600bar)
- Air pressure operating range of 29 to 145psi (2 to 10bar)
- Noise level of 80dB ensures quiet operation
- Design engineering utilising quality components of Hard Chromed Steel, Zinc Plated Steel, PTFE, NBR & Cast Iron
- 3/8" BSP(f) air inlet & 3/8" BSP(f) grease outlet
- Dimensions of 1,212mm (H)
- Weight of 11kg



\$1,360⁰⁰

223003N ALEMLUBE 180KG GREASE KIT WITH HOSE REEL

- Transfer kit delivery rates of up to 300g/min
- Suits 180kg drums
- Impact resistant heavy duty 15m x 6mm ID Rewinda Hose Reel
- 0.9m lead in hose with 1/4" BSPT(m) inlet & outlet hose connections
- Samoa PM3 Air Operated Grease Pump
- Maximum fluid outlet pressure of 7,700psi (531bar)
- Samoa Heavy Control Valve with Z swivel rigid outlet & 3 jaw coupler



\$2,420⁰⁰

G10030 EL SERIES 450G AIR OPERATED GREASE GUN

- Develops grease pressures of up to 6,000psi (414bar)
- Continuous grease flow ensures effortless greasing
- Three way loading
- Exclusive air piston design ensures consistent priming
- 450g cartridge capacity
- Includes a 300mm long grease gun flex & four jaw coupler



\$82⁰⁰

G10010N EL SERIES 450G TRIGGER ACTION GREASE GUN

- Grease pressures of up to 4,000psi (276bar)
- Delivery rates of up to 1.15g per stroke
- Robust die cast aluminium head assembly
- Heavy duty 4 jaw coupler
- Suits 450g cartridge or bulk grease
- Three way loading
- Unique follower cup design
- Exceptional value for money for cost conscious customers



\$36⁵⁰

630A SAMOA 20V LITHIUM-ION 450G CORDLESS GREASE GUN

- Backlit display provides real time battery level, grease level & grease dispensed operator feedback information
- Supplied with 2 x 2Ah batteries & compartmentalised protective plastic carry case
- Grease pressures up to 7,250psi (500bar)
- Adjustable delivery rates of 100g/min or 160g/min
- Able to dispense up to 16 cartridges before battery recharge is required



\$565⁰⁰

670AN6 ALEMITE 20V LITHIUM-ION 450G CORDLESS GREASE GUN

- 4 point stand design allows the gun to be placed down while greasing
- Powerful 4.0Ah battery plus 2.5Ah spare battery supplied standard
- Delivery rates of up to 170g/min
- Grease pressures of up to 10,000psi (690bar)
- 120cm long grease gun flex for extra reach
- Up to 40 cartridges per battery charge due to the latest motor technology
- Dual flow rates: 113g/min and up to 170g/min



\$1,310⁰⁰

600A ALEMLUBE 450G LEVER ACTION GREASE GUN

- Grease pressures of up to 12,000psi (828bar)
- Delivers up to 1.6g of grease per stroke
- Unique Twin-Lock System seals the piston and eliminates the possibility of dummy lubrication
- Coarse thread on barrel assembly eliminates the possibility of cross threading
- Bulk filling capacity of 500g
- Light weight aluminium die cast head assembly



600ANQRC as above but with quick release coupler \$135⁰⁰

\$79⁰⁰

G10020N EL SERIES 450G LEVER ACTION GREASE GUN

- Grease pressures of up to 8,000psi (552bar)
- Delivery rates of up to 0.95g per stroke
- Robust die cast head assembly
- Ideal for seasonal or intermittent use
- Heavy duty 4 jaw coupler



\$28⁷⁰

L4674 ALEMLUBE AGRICULTURAL GREASE NIPPLE ASSORTMENT KIT

- Includes 120 of your most popular agricultural grease nipples in a convenient compartmentalised carry kit
- All grease nipples included in the kit are case hardened, fully chromated, zinc passivated, batch tested to 8,000psi (552bar) & conform to international standards including BSS 1486, DIN 7142, SAE J534 and JIS B1575

L4675 as above but imperial 101 piece grease nipple kit \$61⁶⁰

L4676 as above but metric 100 piece grease nipple kit \$56⁶⁰



\$79⁷⁰



*Applies to the majority of Alemlube products unless otherwise stated.

www.alemlube.com.au

BACK TO BASICS OIL



75490 ALEMLUBE 1,500L TWIN SKINNED TANK

- Consists of an internal HDPE tank surrounded by an integrated galvanised sheet steel bund
- Suitable for the storage of fresh oil, waste oil & diesel fuel
- 2" BSP(f) inlet ports
- Dimensions of 1,630mm (L) x 770mm (W) x 1,950mm (H)



73920N as above
but 1,000L
\$3,125⁰⁰

\$5,135⁰⁰

454695 SAMOA 3:1 OIL TRANSFER KIT FOR IBC'S

- 3:1 ratio pump, dual pedestal hose reel with 10m of hose, a top mounting bracket & electronic oil meter
- Dual pedestal hose reel won't distort or bend due to angular hose pull
- Electronic oil meter powered by quickly & easily replaceable AAA batteries
- IBC not included



454695C as above
but with pallean
\$5,410⁰⁰

\$3,565⁰⁰

AA205-3DG ALEMLUBE AUTOMOTIVE 205L 3 DRUM LUBRICATION GANTRY



- Designed to be a cost effective, low maintenance oil delivery system
- Moulded fibreglass mesh for drum support
- Alemlube 20m x 1/2" ID spring rewind oil hose reels
- Digital metered control guns, with drip trays
- Heavy duty 5:1 oil drum pump



AA205-2DG as above
but for 2 drums
\$6,115⁰⁰

\$6,835⁰⁰

29306-504C ALEMLUBE HOSE REEL GANTRY WITH 6 X 15M REELS PLUS CABINET

- Alemlube hose reel gantry with 6 oil hose reels
- Cabinet storage for tools & workshop equipment
- Complete with 6 x 15m x 12mm ID oil hose reels
- Ideal to install close to service bays



29304-504C as above
but with 4 gantry
\$9,360⁰⁰

\$10,635⁰⁰

454697 SAMOA IBC OIL STORAGE & TRANSFER KIT - SIDE MOUNT

- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Includes oil pump, oil hose reel and oil control valve with digital meter
- Environmentally friendly as costly and time consuming empty 205L drum disposal is no longer required
- IBC not included



454697C as above
but with 1,000L pallean
\$5,355⁰⁰

\$3,485⁰⁰

545110 ALEMLUBE 400L SELF BUNDED OIL STORAGE & DISPENSING KIT

- Complete with 353120 3:1 Ratio Oil Transfer Drum Pump with downtube 365534 Electronic Oil Meter
- Tank dimensions of 700mm (W) x 730mm (D) x 1,170mm (H)



656110N as above
but 1,000L
\$3,115⁰⁰

\$2,855⁰⁰

309010 PIUSI 12V OIL TRANSFER TANK PUMP

- DC self priming gear type oil transfer pump complete with integrated by-pass valve
- Flow rates of up to 10L/min
- Operating pressures up to 70psi (5bar)
- Suitable for use with lubricants up to 600 centistokes
- Noise levels less than 65 decibels
- 3/4" BSP(f) inlet/outlet
- Ideal for high use applications in remote areas where 240V power and compressed air are not available



\$785⁰⁰

454110N SAMOA 3:1 OIL TRANSFER KIT WITH METER

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air consumption 180NL/min (6.4 cfm)
- Air inlet: 1/4" BSP(f)
- Fluid outlet: 1/2" BSP(f)
- Noise level: 80dB



454111N as above
but with a manual nozzle
\$885⁰⁰

\$1,080⁰⁰

030050 EL SERIES OIL TRANSFER KIT WITH METER



- Flow rates of up to 10L/min
- Includes a 3:1 ratio oil pump, 1/2" hydraulic hose, electronic oil meter and adjustable 2" bung adaptor
- Suits 205L drums and transfers engine, gear hydraulic oils up to SAE130 and ATF
- Air consumption of 3.6 cfm at 150psi
- Pump noise level of 82 dB
- Maximum operating pressure of 450psi (30bar)



\$750⁰⁰

347120 SAMOA 5:1 RATIO OIL TRANSFER STUB PUMP

- Ideal for dispensing high viscosity lubricants in sites with multiple banks of reels
- Can service up to 8 reels
- Maximum free flow of up to 30L/min
- 3/4" BSP(f) fluid outlet
- 3/8" BSP(f) air inlet
- Suitable for bulk tank applications



348120 as above
but 205L drum pump
\$1,190⁰⁰

\$1,150⁰⁰

353120 SAMOA 3:1 RATIO OIL TRANSFER STUB PUMP

- Suitable for transferring oil, ATF & coolant
- Maximum free flow delivery of 35L/min
- Operating air pressure range of 40-140psi (3-10bar)
- Air inlet of 1/4" BSP(f)
- Fluid outlet of 1/2" BSP(f)
- Air consumption of 500NL/min (17.6 cfm) at 7bar
- Weight of 2kg



354120 as above
but 205L drum pump
\$725⁰⁰

\$725⁰⁰

334900 PIUSI 240V OIL TRANSFER TANK PUMP

- AC vane type pump with sintered steel rotor & resin vanes
- Suitable for the transfer of engine, gear, diff & hydraulic oils up to 500cSt
- Delivery rates up to 25L/min
- 3/4" BSP(f) inlet/outlet
- Continuously rated with pressures up to 85psi (6bar)



\$920⁰⁰

363114 SAMOA 1/2" OIL CONTROL VALVE

- Flow rates of up to 40L/min
- Maximum working pressure of 1,450psi (100bar)
- 1/2" BSP(f) inlet port & swivel
- Trigger lock helps to prevent accidental dispensing
- Compact ball bearing swivel with integrated oil filter ensures a long working life
- Manual open/close nozzle operation minimises annoying oil drips & leaks
- Ergonomic grip and trigger reduces operator fatigue



365534 as above but with electronic meter
\$535⁰⁰

\$185⁰⁰

030060 EL SERIES 205L MOBILE OIL TRANSFER KIT



- 3:1 ratio 205L air operated oil drum pump
- Capable of delivery rates of up to 10L/min
- Complete with 4m of 1/2" ID RI oil hose
- Air consumption of 3.6cfm at 150psi
- Maximum oil viscosity of SAE130
- Pump suction tube length of 940mm
- Reliable metered oil control valve with 5-digit LCD & low battery indicator



030070 as above
but with hose reel
\$1,890⁰⁰

\$1,115⁰⁰

228701N ALEMLUBE 205L MOBILE OIL TRANSFER KIT



- Transfer kit flow rates of up to 35L/min
- Suits 205L drums
- Impact resistant heavy duty hose reel
- 10m x 12mm ID delivery hose
- 0.9m lead in hose
- Maximum fluid outlet pressure of 420psi (30bar)
- Samoa meter with flexible nozzle
- Heavy duty trolley with robust solid wheels



\$2,625⁰⁰

365654 SAMOA HIGH FLOW METERED OIL CONTROL VALVE

- Dispenses & meters synthetic and mineral oils
- Flow rates of up to 70L/min
- Maximum working pressure of 1,450psi (100bar)
- 3/4" BSP inlet/outlet
- Flexible outlet with non-drip nozzle
- Meter display shows trip mode, calibration mode, flow rate mode, total mode and battery charge
- Operating temperature of -23°C to 70°C
- Measures in litres, quarts, pints & gallons
- Accurate to ±0.5%



\$950⁰⁰

365316 SAMOA ELECTRONIC PRE-SET OIL METER

- Flow range of up to 30L/min
- Maximum operation pressure of 1,425psi (100bar)
- Accuracy/Repeatability ±0.5 %
- 1/2" BSP(F) swivel inlet
- Maximum totalizer 999999 units
- Maximum recorded dispense 999.9 units
- Different preset values in memory 10
- Working temperatures ranges -10°C to +50°C
- Battery 4 x AA alkaline
- Wetted parts aluminium, AISI 316 stainless steel, buna-n, delrin, brass, zinc plated steel



\$1,280⁰⁰

363054 SAMOA 3/4" HIGH VOLUME OIL CONTROL VALVE

- High volume control valve with 3/4" BSPF threaded inlet
- Flow rates of up to 80L/min
- Flexible hose extension with semi-automatic non-drip nozzle
- Maximum working pressure of 1,450psi (100bar)
- Operating temperature range of -10°C to 70°C
- 3/4" BSP (f) fluid inlet
- Outlet hose with 3/4" BSP (m) connection thread with bonded seal to assure a leak free operation
- Safety guard avoids accidental valve opening



\$560⁰⁰



*Applies to the majority of Alemlube products unless otherwise stated.

www.alemlube.com.au

BACK TO BASICS CORROSIVE & AGGRESSIVE FLUIDS



AB80070 EL SERIES ADBLUE® AUTOMATIC SHUT-OFF NOZZLE WITH DIGITAL METER



- Flow rates up to 50L/min
- Digital meter with 5-digit current dispensed total
- Automatically shuts off on back pressure
- Cumulative total up to 999,999.9
- Resettable digital meter



\$390⁰⁰

AB80005 EL SERIES ADBLUE® IBC 240V DISPENSING KIT



- 240V AC pump
- Flow rates of up to 28L/min
- Polypropylene pump housing, EPDM diaphragm & Viton seals
- Stainless steel mounting base fits IBC containers
- Automatic stainless steel nozzle
- In-line digital meter
- 1.5m x 3/4" ID suction
- 6m x 3/4" ID delivery



\$1,195⁰⁰

101000 PIUSI ADBLUE® IBC STORAGE & DISPENSING KIT WITH METER

- Heavy duty self priming membrane pump and manual nozzle
- 6m delivery hose
- Includes a 1.5m suction hose pump to IBC mounting adaptor
- Self contained on a stainless steel mounting bracket with nozzle holster the kit is easily moved from one IBC to another
- Flow rates of up to 32L/min



\$2,005⁰⁰

201311 ALEMLUBE ADBLUE® IBC DISPENSING KIT

- Flow rates of up to 45L/min free flow
- 1/2" air operated diaphragm pump
- 10m x 3/4" AdBlue® hose reel
- Automatic shut off AdBlue® nozzle
- Inline digital AdBlue® meter
- Duty cycle of 20 minutes on, 20 minutes off
- Also available in several different combinations such as 201312 with diaphragm pump, meter & auto nozzle (no reel); 201313 with diaphragm pump & manual nozzle only



\$4,040⁰⁰

201220 ALEMLUBE ADBLUE® 240V IBC DISPENSING KIT

- Heavy duty self priming membrane pump & manual nozzle
- 6m delivery hose
- Includes a 1.5m suction hose pump to IBC mounting adaptor
- Flow rates of up to 32L/min
- Pump duty cycle of 20 minutes on/off
- Self contained on a stainless steel mounting bracket with nozzle holster the kit is easily moved from one IBC to another
- IBC not included



\$1,745⁰⁰

SB325M PIUSI ADBLUE® AUTOMATIC SHUT-OFF NOZZLE WITH DIGITAL METER

- Flow rates of up to 35L/min
- Operating pressure of 50psi (3.5bar)
- 3/4" hose tail inlet
- 19mm spout diameter
- Light (1.0kg), ergonomic & easy to handle
- Automatic shut off
- Batches of up to 9,999L
- 5 digit partial display & totaliser
- Resettable total and calibration available
- Low battery icon



\$970⁰⁰

ALE-25BST ALEMLUBE AIR OPERATED 1" STAINLESS STEEL DIAPHRAGM PUMP

- Maximum flow rates of 160L/min
- 1" BSP(f) inlet/outlet
- Suitable for use with solids up to 3mm OD
- Air supply pressure range: 0.2-0.7 MPa
- Stainless steel body and Teflon diaphragms
- Suitable for the transfer of MEK (methylene ketone), hydrochloric acid up to 20% concentration, phosphoric acid, methanol, paint thinners & water
- Maximum delivery per cycle of 600mL
- Weight of just 13kg



\$3,335⁰⁰

JP-140-PP-HC-1000 JESSBERGER 205L CHEMICAL DRUM PUMP KIT WITH POLYPROPYLENE PUMP TUBE - 240V

- Flow rates of up to 49L/min
- Supplied complete with electric motor & poly pump tube, 2m PVC hose, stainless steel hose clamps and PVDF nozzle
- Suitable for hydrochloric acid, phosphoric acid, liquid fertiliser, citric acid, iron(II) & iron(III), chloride & distilled water
- Manufactured in Germany



\$1,495⁰⁰

JP-280-PP-HC-1000 JESSBERGER 205L DRUM PUMP KIT WITH POLYPROPYLENE PUMP TUBE - 240V

- Flow rates of up to 112L/min
- Supplied complete with electric motor, 1,000mm polypropylene pump tube, 2m multi-purpose chemical hose, stainless steel hose clamps and PVDF nozzle
- Suitable for hydrochloric acid, phosphoric acid, liquid fertiliser, citric acid, iron(II) & iron(III), chloride & distilled water
- Manufactured in Germany



\$2,450⁰⁰

JP-280-PVDF-HC-1000 JESSBERGER 205L DRUM PUMP KIT WITH PVDF PUMP TUBE - 240V

- Flow rates of up to 112L/min
- Supplied complete with electric motor, 1,000mm PVDF pump tube, 2m multi-purpose chemical hose, stainless steel hose clamps and PVDF nozzle
- Suitable for hydrofluoric acid, sodium, hydrochloride, sulphuric acid to a concentration of 90%
- Manufactured in Germany



JP-180-PVDF-HC-1000
as above but with 93L/min
\$3,855⁰⁰

\$3,770⁰⁰

332080N2 PIUSI ADBLUE® 205L DRUM ROTARY ACTION PUMP

- Made from stainless steel, polypropylene & fibre glass
- Hand rotating pump delivering up to 38L/min per rotation
- 2.5m clear delivery hose
- Stainless steel spout
- Air tight spout cap
- Trisure & Mauer drum bung adaptors included



\$345⁰⁰

ALE-15BST ALEMLUBE AIR OPERATED 1/2" STAINLESS STEEL DIAPHRAGM PUMP

- Maximum flow rate of 45L/min
- 1/2" NPT(f) inlet & outlet connections
- 1:1 ratio diaphragm pump
- Stainless steel body with Teflon diaphragms
- Pressure up to 100psi (7bar)
- 70cc discharge per cycle
- Weight 6.2kg



\$2,810⁰⁰

225 ALEMLUBE POLYPROPYLENE SYPHON DRUM PUMP

- Plunger action syphon pump can deliver up to 20L/min
- Constructed with a polypropylene pump head & a PTE pick up tube
- Includes a 875mm pick up tube & a 1.2m delivery hose
- Adjustment knob on the top of the pump can be used to stop the pump from siphoning
- Suitable for 60L or 205L drums



\$38⁹⁰

401A ALEMLUBE RYTON ROTARY DRUM PUMP

- Flow rates of up to 20L/min
- Ryton body and Ryton & stainless steel wetted parts
- Provides excellent chemical compatibility
- Unique, rotating 2 piece discharge spout assists fluid transfer
- Suitable for 60L or 205L drums
- Suitable for the transfer of low viscosity chemicals, lacquers, AdBlue® & mild acids



\$195⁰⁰

301A ALEMLUBE POLYPROPYLENE ROTARY DRUM PUMP

- Flow rates of up to 20L/min
- Polypropylene body & polypropylene and stainless steel wetted parts
- Offers excellent chemical resistance
- Unique, rotating 2 piece discharge spout assists fluid transfer
- Suitable for the transfer of herbicides, pesticides, chemicals & mild detergents
- Suitable for 60 or 205L drums & bulk tanks



\$125⁰⁰

801A ALEMLUBE STAINLESS STEEL ROTARY DRUM PUMP

- Rotary action facilitates quick & effortless fluid transfer
- 2" standard BSP bung adaptor
- Flow rates of up to 18L/min or 0.3L per rotation
- Compact and sturdy construction
- Wetted parts of 304 stainless steel, Teflon and Ryton® rotor
- Effortless rotary action operation
- Suitable for 60L or 205L drums



\$655⁰⁰

950 ALEMLUBE LEVER ACTION POLY DRUM PUMP

- Suitable for the transfer of pesticides, herbicides, mild acids & detergents
- Delivers 330mL on the down stroke
- Polypropylene body, piston and valves with nitrile seals
- Robust – tested to over 2 million strokes
- Telescopic pick up tube makes the pump suitable for 60L or 205L drums



\$99⁵⁰

332100 PIUSI IBC ADBLUE® ROTARY HAND PUMP

- Output rate of 38L per 100 revolutions
- Suction hose length of 1m
- Delivery hose length of 2.5m
- Suitable for use with AdBlue®
- Can also be used to dispense water & antifreeze
- Stainless steel metal components
- Stainless steel support bracket
- All materials are chemically compatible with AdBlue®



\$505⁰⁰

BACK TO BASICS WASTE OIL, SPILL CONTAINMENT AND SAFETY



SJ-200-010 ALEMLUBE 4 DRUM RACK SPILL CONTAINER

- Compatible with standard 205L drums
- Ideal for storage & dispensing from up to 4 drums
- Manufactured from 100% recyclable polyethylene
- Spill containment capacity of 450L
- UV and weather resistant
- Tested for weight and hydrostatic loads
- DIBt German Standards approved
- Dimensions of 940mm (L) x 1,375mm (W) x 390mm (H)
- Weight of 61kg



\$1,785⁰⁰

SC60090 EL SERIES 4 DRUM SPILL CONTAINER

- Complete with sump plug for draining
- High strength polyethylene
- High visibility yellow pallet with black grate
- Easily moved by forklift
- Removable platform for cleaning
- Nestable design for easy & efficient storage
- Dimensions: 1,300mm x 1,300mm x 300mm
- Weight: 36kg
- Spill containment capacity: 250L
- Helps create an WH&S compliant workplace



\$645⁰⁰

SC60050 EL SERIES DOUBLE IBC CONTAINER


- Complete with sump plug for draining
- High strength polyethylene
- High visibility yellow pallet with black grate
- Easily moved by forklift
- Removable platform for cleaning
- Nestable design for easy & efficient storage
- Dimensions: 2,200mm x 1,300mm x 500mm
- Weight: 100kg
- Spill containment capacity: 1,800L
- Helps create an WH&S compliant workplace



\$3,155⁰⁰

SJ-300-006 C ALEMLUBE 300 SERIES 4 DRUM SPILL CONTAINER WITH MODULAR RAMP

- 100% recyclable polyethylene construction
- Slip resistant texture on workfloor deck and ramp
- Cannot rust or corrode
- Excellent chemical compatibility
- Sump capacity of 240L
- Dimensions of 1,600mm (L) x 1,600mm (W) x 150mm (H)

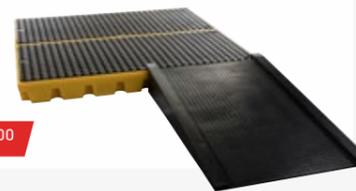

\$995⁰⁰

SCFB1 ALEMLUBE DRIVE OVER 1M URETHANE FLOOR BUNDING

- Classic high visibility yellow colour minimising trip hazards for pedestrians
- Easy to install using floor bolts or even adhesives
- 1 metre pieces & corner joints that fit tightly together to form continuous lengths that fit any shape or floor space
- Chemical, oil, diesel, Adblue® & petrol resistant urethane
- Drive over toughness allowing forklifts to drive through
- Size: 1,000mm (L) x 150mm (W) x 25mm (H)



\$170⁰⁰

SCFBCJ ALEMLUBE DRIVE OVER FLOOR BUNDING CORNER JOINT

- Classic high visibility yellow colour minimising trip hazards for pedestrians
- Easy to install using floor bolts or even adhesives
- 1 metre pieces & corner joints that fit tightly together to form continuous lengths that fit any shape or floor space
- Chemical, oil, diesel, Adblue® & petrol resistant urethane
- Drive over toughness allowing forklifts to drive through
- Low bund height profile to allow unimpeded drive over



\$47⁵⁰

66200 ALEMLUBE DRUM STORAGE & SPILL CONTAINMENT RACK - 2 X 205L

- Full metal design, solid construction & corrosion resistant
- Rack & drip tray total weight is approximately 83kg
- Spill tray containment capacity of 150L
- Clear drip through rack design allows leaks to be contained in the spill catchment tray
- Size: 1,310mm (W) x 640mm (D) x 2,000mm (H)



66100 as above
but 4 x 205L
\$1,365⁰⁰

\$310⁰⁰

ALE-25BAH ALEMLUBE 1" ALUMINIUM DIAPHRAGM PUMP

- 1" BSP(f) inlet/outlet
- Flow rates of up to 160L/min
- Optimal stroke length maximises diaphragm life and performance with minimal downtime & maintenance costs
- Suitable for the transfer of diesel fuel, gear oil, engine oil, waste oil, brake fluid & antifreeze
- Aluminium body & hytrel diaphragms
- Teflon and stainless steel models also available



\$1,995⁰⁰

ALE-20BAH ALEMLUBE 3/4" ALUMINIUM DIAPHRAGM PUMP

- Maximum flow rates of 100L/min
- 3/4" BSP(f) inlet/outlet
- Aluminium body & hytrel diaphragms
- Suitable for the transfer of diesel fuel, gear oil, engine oil, antifreeze & waste water
- Maximum delivery per cycle of 350mL
- Light weight at 9kg
- Mounting hole layout of 140mm x 195mm
- Dimensions of 249mm (W) x 319mm (H) x 180mm (D)



\$1,630⁰⁰

ALE-15FPH ALEMLUBE 1/2" AIR OPERATED DIAPHRAGM PUMP

- Flow rates of up to 45L/min
- 1/2" BSP(f) inlet/outlet
- Rugged bolted construction eliminates leaks & simplifies post maintenance reassembly
- Also suitable for the transfer of waste water, fuel, oil and some pesticides & herbicides



\$1,020⁰⁰

ALE-40BAH ALEMLUBE 1-1/2" ALUMINIUM DIAPHRAGM PUMP

- Aluminium body & hytrel seals
- 1-1/2" BSP(f) fluid inlet/outlet
- Maximum flow rates up to 400L/min
- Maximum delivery per cycle of 2,800mL
- Mounting hole layout of 200mm x 268mm
- Dimensions of 411mm (W) x 707mm (H) x 250mm (D)



\$3,235⁰⁰

66300 ALEMLUBE DRUM STORAGE & SPILL CONTAINMENT RACK - 12 X 60L

- Full metal design, solid construction & corrosion resistant
- Rack & drip tray total weight is approximately 68kg
- Spill tray containment capacity of 150L
- Clear drip through rack design allows leaks to be contained in the spill catchment tray
- Size: 620mm (W) x 640mm (D) x 2,000mm (H)



66400 as above
but 6 x 60L
\$1,045⁰⁰

\$1,270⁰⁰

AR30CBRY REWINDA CAUTION SAFETY BARRIER REEL

- Designed for use in areas requiring demarcation to identify work zones or restricted access
- Highly visible guides that are essential in managing your workplace & employee safety
- 30m x 48mm yellow & black caution band with fixed handle
- Weight of 9.4kg
- Dimensions of 580mm (L) x 480mm (H) x 270mm (W)



AR30DBRR as above
but red
\$245⁰⁰

\$245⁰⁰

42100 ALEMLUBE COMMERCIAL VEHICLE MOBILE WASTE OIL DRAINER

- Holding tank capacity of 100L
- Sturdy and durable construction
- 145mm high swivelling front rubber wheels facilitate accurate mobility
- Internal baffles reduce the possibility of waste oil spillage
- Ideal for busy truck and bus workshops
- 860mm handle length
- Dimensions: 1,098mm (L) x 805mm (W) x 240mm (D)



\$630⁰⁰

372400 SAMOA MOBILE WASTE OIL DRAINER

- Premium quality & European engineering
- Drain bowl capacity of 20L
- Holding tank capacity of 100L
- Maximum working height of 2,000mm
- Minimum working height of 1,400mm
- Unique specially molded tray can be used to hold bolts, filters & washers
- Waste fluids can be pressurised or pumped out of the 100L capacity holding tank



\$2,060⁰⁰

30080 ALEMLUBE MOBILE WASTE OIL DRAINER

- Transfers & captures waste oil from crankcases, transmissions and differentials
- Catchment bowl capacity of 20L
- Holding tank capacity of 80L
- Height adjustable waste oil reservoir
- Holding tank emptied with the aid of air pressure
- Equipped with a pneumatic safety relief valve calibrated at 14psi (1bar)



\$585⁰⁰

42110 ALEMLUBE COMMERCIAL VEHICLE PIT ROLLING WASTE OIL DRAINER

- Holding tank capacity of 110L
- Height: 245mm
- Dimensions: 800mm (L) x 700mm (W) x 245mm (H)
- Range of Slid Rod Handle of 900mm - 1,315mm enables the unit to be used on pits of varying widths
- Weight of 40kg



\$970⁰⁰

AR1024020CRR REWINDA ELECTRICAL CABLE REEL - 20M X 240V 10 AMP

- 20m length with 1.5m lead in cable
- 240V 10 amp power supply
- Automatic & positive latching mechanism with speed control break system
- Detachable steel mounting bracket enables 180° cable reel rotation
- Weight of 11kg
- Dimensions of 390mm (L) x 410mm (H) x 200mm (W)



AR1524020CRR
as above but 15 amp
\$390⁰⁰

\$315⁰⁰

BACK TO BASICS WORKSHOP MUST HAVES



AAPKA24 ALEMLUBE AUTOMOTIVE PREMIUM 650W MOBILE EVAPORATIVE AIR COOLER

18 MONTH WARRANTY

- Suitable for warehouses & workshops where traditional cooling methods are impractical and cost prohibitive
- 240V 650W 3 speed motor 5.5 Amps
- Fan diameter – 24"/60cm
- Maximum cooling area – 150sqm
- Maximum air delivery – 12,000M3/H
- Tank capacity – 70L
- Maximum water consumption – 10L/H
- Dimensions – 92.5cm x 58cm x 144cm
- Creates a cooler move productive workplace
- Environmentally friendly



\$1,130⁰⁰

AA402-240V ALEMLUBE AUTOMOTIVE 4.0T ELECTRO-HYDRAULIC 2-POST CLEAR FLOOR HOIST

1 YEAR WARRANTY

- 240V single phase operation
- Lifting capacity of 4,000kg
- Maximum lifting height of 2,000mm
- Minimum lowered height of 110mm
- Fast lifting time of 60 seconds
- Fast lowering time of between 18 to 40 seconds
- 100mm 4WD spacers included
- Standard height clearance of 3,950mm with overall height of 4,140mm



\$3,190⁰⁰

ESOC875E ALEMLUBE AUTOMOTIVE PREMIUM COMMERCIAL VEHICLE OIL CHANGE SYSTEM

- Fully pneumatic environmentally safe oil change
- Eliminates operator contact with oil
- Allows technicians to perform other tasks
- Spill-free fittings means zero mess
- Air supply 125psi at 6SCFM
- Fresh oil supply: Minimum 500psi
- Dimensions: 1,200mm (H) x 550mm (W) x 600mm (D)
- Weight: 150kgs
- Uses an integrated pistol grip oil dispenser



\$22,390⁰⁰

AAPMC10T ALEMLUBE AUTOMOTIVE PREMIUM HEAVY DUTY 810T MOBILE WIRELESS COLUMN LIFT

18 MONTH WARRANTY

NEW

- Lifting capacity of 10 tonne per column
- Up to 16 columns in a system
- Lifting time – 100 seconds
- Wireless connection
- Maximum lifting Height 1,700mm
- Each column can be a master or a slave
- Easy to move adjustable forks – maximum 1,350mm, minimum 550mm
- Control panel with LCD colour touch screen



\$9,540⁰⁰

AA49010 ALEMLUBE AUTOMOTIVE 1.2T LIFTING TABLE

1 YEAR WARRANTY

- Capacity of 1,200kg
- Rest Height of 480mm
- Lifting Height of 1,810mm
- Platform Width of 770mm
- Platform Length of 1,300mm



\$3,460⁰⁰

AAPKA30 ALEMLUBE AUTOMOTIVE PREMIUM 1,100W MOBILE EVAPORATIVE AIR COOLER

18 MONTH WARRANTY

NEW

- Suitable for warehouses & workshops where traditional cooling methods are impractical and cost prohibitive
- 240V 1,100W 3 speed motor 9 Amps
- Fan diameter – 30"/76cm
- Maximum cooling area – 220sqm
- Maximum air delivery – 23,000M3/H
- Tank capacity – 130L
- Maximum water consumption – 20L/H
- Dimensions – 112cm x 64cm x 160cm



\$1,450⁰⁰

8828N3 ALEMLUBE 20L OIL DRUM PUMP

- Capable of delivering up to 110mL per stroke
- Downtube extension & extra Rieke adaptor make the pump suitable for use with a variety of 20L drums available on the market
- With a longer plastic extension for new taller 20L oil drums



\$47⁸⁰

11020 ALEMLUBE BATTERY OPERATED 20L OIL DRUM PUMP

NEW

- Alemlube rechargeable battery operated 20L oil drum pump
- Supplied with a power head with a run time of 65 minutes fully charged
- 21.6V 2.5Ah lithium-ion rechargeable battery
- 240V battery recharger
- 1.5m long reinforced oil delivery hose
- Integrated carry handle
- Drainback nozzle holder avoids oil leaks



\$425⁰⁰

11020PTA ALEMLUBE 20L OIL DRUM PUMPTUBE ASSEMBLY

NEW

- Designed and engineered with performance, durability and serviceability in mind
- Drainback nozzle holster ensures that excess oil returns to the drum
- Swivelling control valve eliminates the chance of annoying hose kinks
- Control valve can be locked in the open position



\$185⁰⁰

11205 ALEMLUBE BATTERY OPERATED 205L OIL, AFT & COOLANT DRUM PUMP

NEW

- Delivers up to 280L per battery charge
- Delivery rates of up to 4.3L per minute
- Run time of up to 65 minutes fully charged
- 21.6V 2.5Ah Li-ion rechargeable battery
- 45 minutes fast recharge time
- Weatherproof rating of IP42
- Impact resistance rating of IK10



\$475⁰⁰

11205PTA ALEMLUBE 205L OIL DRUM PUMPTUBE ASSEMBLY

- The 3 piece threaded suction tube, can be adapted to suit both 205L & 60L drums
- Designed & engineered with performance, durability and serviceability front of mind
- Drainback nozzle holster ensures that excess oil returns to the drum
- Swivelling control valve eliminates the chance of annoying hose kinks



\$190⁰⁰

030010N EL SERIES OIL DRUM PUMP

- Smooth pump action delivers 80ml on the downstroke
- Drain back nozzle holster
- Long life hose & non-drip nozzle
- Comfortable and easy to use T handle
- For use with 20L drums
- Supplied complete with a Rieke adaptor



\$47⁵⁰

6603A ALEMLUBE 1L BRAKE CLEANER SPRAYER

- Robust construction & ergonomic design
- Resistant to oils, most hydrocarbons & solvents
- Adjustable conical nozzle
- Safety valve at 36psi (2.5bar) with depressurisation option
- Wide application range in the automotive, construction, industrial & agriculture sectors
- 1L capacity
- Wide filling opening reduces spills



\$49⁵⁰

FA2 ALEMLUBE DIESEL FILTER WITH CLEAR PLASTIC BOWL

- Alemlube diesel filter with replaceable clear plastic bowl
- For use with pumps up to 100L/min
- Suitable for fuel
- 1" BSP(f) inlet & outlet thread
- 10 micron fuel filter element
- Replacement elements easily available



\$105⁰⁰

5115478-50 ALEMLUBE GREASE HOSE 8.3MM DIA 280 BAR (50M ROLLS)

- Full range of compression fittings, tubes, hoses, hose end fittings, unions & bulkheads available
- Full range of header blocks, adaptor fittings, push in fittings, push in hose tails, push in tube unions & dust covers available



\$730⁰⁰

5125622-100 ALEMLUBE GREASE NYLON TUBE 6MM DIA 70 BAR (100M ROLLS)

- Full range of compression fittings, tubes, hoses, hose end fittings, unions & bulkheads available
- Full range of header blocks, adaptor fittings, push in fittings, push in hose tails, push in tube unions & dust covers available



\$550⁰⁰

5115481-50 ALEMLUBE HOSE 8.5MM DIA 280 BAR EMPTY (50M ROLLS)

- Alemlube offers a wide range of grease hose and grease tube to suit a wide range of applications
- Available with & without grease, empty or full, 10m rolls, 50m rolls and 100m rolls are stocked and readily available at each of our 6 branches



\$660⁰⁰

5125623-100 ALEMLUBE TUBE NYLON 6MM DIA 70 BAR EMPTY (100M ROLLS)

- Alemlube offers a wide range of grease hose and grease tube to suit a wide range of applications
- Available with & without grease, empty or full, 10m rolls, 50m rolls and 100m rolls are stocked and readily available at each of our 6 branches



\$480⁰⁰

80100 ALEMLUBE 205L/180KG DRUM DOLLY

- Industrial quality steel construction
- Includes 4 x 75mm heavy duty wheel castors
- Maximum load handling of 180kg
- Height of dolly body only 50mm
- Total height including the wheels is 150mm
- Inner diameter of 594mm
- Net weight of 7.0kgs
- Hard wearing enamel paint finish
- WHS friendly



\$84⁰⁰

80060 ALEMLUBE 60L/55KG DRUM DOLLY

- Industrial quality steel construction
- Includes 4 x 50mm heavy duty wheel castors
- Maximum load handling of 55kg
- Height of dolly body is only 41mm
- Total height including the wheels is 106mm
- Diameter is 410mm
- Net weight is 3.1kgs
- Hard wearing enamel paint finish
- WHS friendly



\$94⁰⁰

80082 ALEMLUBE 20L/20KG DRUM DOLLY

- Includes 4 heavy duty castors
- Provides a convenient and easy means of moving 20L drums around a workshop
- Workplace Health and Safety friendly
- Also suitable for 20kg drums



\$54⁷⁰

7701A ALEMLUBE 1L MULTI PURPOSE TOP UP KIT

- Ideal for topping up difficult to access oiling points in the workshop and at home
- Container capacity of 1L
- 500mm long PVC hose
- Dispenses up to 6mL per stroke
- 100ml graduation lines on bottle to measure product usage
- Ideal for multi-purpose fluids with a clear bottle
- Suitable for all oils, automatic transmission fluids, brake fluids & some hand cleaners



\$22⁹⁰

2 YEAR WARRANTY

*Applies to the majority of Alemlube products unless otherwise stated.

www.alemlube.com.au

13



508225 SAMOA HEAVY DUTY 15M X 25MM MULTI-FLUID HOSE REEL

- Ideal for transferring high volumes of oil, diesel, waste oil, coolant, water & air Weight of 61kg
- Working pressure 1,300psi (90bar)
- 1" BSP inlet and 1" BSP outlet
- Fatigue resistant steel spring delivers years of durable performance
- Complete with 15 metres x 25mm ID R1 hose & hose stop
- Dimensions of 635mm (W) x 699mm
- Weight 56kg
- Full metal heavy duty construction



\$3,080⁰⁰

HR90005BSS EL SERIES WATER & AIR STAINLESS STEEL SPRING REWIND BARE REEL

- Reinforced stainless steel frame provides maximum strength & stability
- Working pressure of up to 300psi (2bar)
- 30m x 25mm ID rubber hose capacity
- Working temperature of -20°C - +60°C
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Reliable spring life tested to 20,000 cycles
- Positive ratchet lock design ensures a long working life
- Can be mounted on the floor, wall or ceiling



\$2,210⁰⁰

HR90005 EL SERIES 1" AIR, WATER & FUEL HOSE REEL

- Reinforced steel frame provides maximum strength & stability
- Working pressure of up to 300psi (20bar)
- Includes 30m x 25mm ID rubber hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Reliable spring life of 20,000 cycles and positive ratchet lock design
- Can be mounted on the floor, wall or ceiling
- Durable long lasting powder coated finish



\$1,220⁰⁰

HR90010 EL SERIES SPRING REWIND 15M X 25MM ID DIESEL HOSE REEL

- 15m x 25mm ID hose
- Full spring rewind operation
- Corrosion resistant and suitable for fuel, oil, air or water
- Pressure rating 300psi (20bar)
- Heavy duty construction with 2 mounting positions
- Polyester powder coated for increased wear



\$1,010⁰⁰

HR90025 EL SERIES AIR & WATER SPRING REWIND HOSE REEL

- Reinforced steel frame provides maximum strength & stability
- Working pressure of up to 300psi (20bar)
- Includes 20m x 19mm ID rubber hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Reliable spring life of 20,000 cycles & positive ratchet lock design
- Can be mounted on the floor, wall or ceiling
- Durable long lasting powder coated finish



\$1,110⁰⁰

505232 SAMOA SPRING REWIND HOSE REEL - 20M X 12MM ID

- Dual ball bearing spool support results in very low rotary friction
- Optimised power spring & low friction design ensure smooth and comfortable operation
- Unique non ratch out design enables total mounting flexibility (7 different positions)
- True 3/4" fluid section maximises product delivery
- New design facilitates quicker & easier service and post maintenance reassembly



\$2,420⁰⁰

505224N SAMOA 1 5M X 19MM ID SPRING REWIND HOSE REEL

- Heavy duty full metal double pedestal construction
- Hose capacity: 15m x 19mm ID
- 1,520psi (105bar) hose pressure rating
- 3/4" (f) inlet thread & 3/4" (f) outlet thread
- Seven position outlet arm
- Full port nickel protected steel shaft
- Large effective radial latching area for easy operation



\$2,510⁰⁰

AR6150AR REWINDA OXY ACETYLENE TWIN HOSE REEL - 15M X 6MM ID

- High grade impact resistant UV stabilised covers
- Automatic & positive latching mechanism with speed control brake system
- 15m x 6mm Twin ID hose & 0.9m lead in hoses
- 5/8" UNF(f) left & 5/8" UNF (f) right connections
- 5/8" UNF(m) hose reel inlet thread
- Weight of 15.8kg



\$480⁰⁰

AR1020HPWR REWINDA HIGH PRESSURE HOT WATER WASHDOWN HOSE REEL - 20M X 10MM ID

- Suitable for all high pressure hot water applications
- 3/8" BSPT(m) inlet/outlet connections
- 3/8" BSPT(f) hose reel inlet thread
- Maximum working pressure of 3,000psi (206 bar)
- Working temperature of -40°C to +120°C
- Weight of 21kg



\$510⁰⁰

AR1020CAB REWINDA COMPRESSED AIR HOSE REEL - 20M X 10MM ID

- 3/8" BSPT(m) inlet/outlet connections
- 3/8" BSPT(m) hose reel inlet thread
- Maximum working pressure of 300 psi (20bar)
- Working temperature of -40°C to +80°C
- Weight of 12kg



AR1020CAR as above but red \$285⁰⁰

\$285⁰⁰

AR1217HWR REWINDA HOT WATER WASHDOWN HOSE REEL - 17M X 12MM IDP

- Locking pin which can lock the swivel of the bracket
- 1/2" BSPT(m) outlet & 3/4" BSP(f) inlet connections
- 1/2" BSPT(f) hose reel inlet thread
- Maximum working pressure of 300psi (20bar)
- Working temperature of -20°C to +100°C
- Weight of 17kg



\$405⁰⁰

AR6150PR REWINDA OXY PROPANE TWIN HOSE REEL - 15M X 6MM ID

- Grade T heat resistant oxy propane welding hoses
- High grade impact resistant UV stabilised covers wont fade over time
- 5/8" UNF(f) left & 5/8" UNF(f) right inlet hose connection
- 5/8" UNF(m) hose reel inlet thread
- Weight of 15.7kg



\$495⁰⁰

51714 ALEMLUBE 3/8"-1/2" WATER & COOLANT GUN

- 3/8" BSP(f) inlet with 1/2" BSP(f) adaptor included
- Maximum working pressure of 435psi (30bar)
- Pull up quick release trigger
- Nickel plated brass nozzle
- Nickel plated aluminium body
- Non-slip rubber handle
- Brass valves with stainless steel springs
- Suitable for non-aggressive liquids
- Maximum operating temperature of -10°C to +90°C



\$68⁵⁰

50010 ALEMLUBE INDUSTRIAL BLOW GUN

- 16bar maximum
- The inlets are made from hard-wearing Acetal Plastic that's harder than brass
- These blow guns combine maximum airflow with a low level of noise providing good functional properties, operational reliability & long life
- Ergonomically correct design, efficient operation whilst being durable & strong



\$11⁵⁰

AR1225GWG REWINDA GARDEN WATER HOSE REEL - 25M X 12MM ID

- 25m x 12mm ID hose with 1.5m lead in hose
- Quick Connector (f) outlet with adjustable spray nozzle
- 3/4" BSP(f) hose reel inlet thread
- Maximum working pressure of 150psi (10bar)
- Working temperature of 0°C to +60°C
- Weight of 13kg



\$265⁰⁰

AR1220CAWB REWINDA AIR & WATER HOSE REEL 20M X 12MM ID

- High grade impact resistant UV stabilised covers
- 1/2" BSPT(m) inlet/outlet connections
- 1/2" BSPT(f) hose reel inlet thread
- Maximum working pressure of 300psi (20bar)
- Working temperature of 0°C to +60°C
- Weight of 13kg



\$285⁰⁰

HA1030 ALEMLUBE COMPRESSED AIR HOSE ASSEMBLY

- 3/8" x 30m long hose
- 300psi (20bar) working pressure
- Highly flexible & elastic
- Complete with Nitto style fittings
- Temperature operating range of -40°C to +80°C
- These hybrid polymer flexible compressed air hose assemblies come with Nitto style fittings for one touch quick release



\$50²⁰

HA1220 ALEMLUBE COMPRESSED AIR HOSE ASSEMBLY

- 1/2" x 20m long hose
- 300psi (20bar) working pressure
- Highly flexible & elastic
- Complete with Nitto style fittings
- Temperature operating range of -40°C to +80°C
- These hybrid polymer flexible compressed air hose assemblies come with Nitto style fittings for one touch quick release



\$52⁰⁰

HA1230 ALEMLUBE COMPRESSED AIR HOSE ASSEMBLY

- 1/2" x 30m long hose
- 300psi (20bar) working pressure
- Highly flexible & elastic
- Complete with Nitto style fittings
- Temperature operating range of -40°C to +80°C
- These hybrid polymer flexible compressed air hose assemblies come with Nitto style fittings for one touch quick release



\$67⁵⁰

HA1210 ALEMLUBE COMPRESSED AIR HOSE ASSEMBLY

- 1/2" x 10m long hose
- 300psi (20bar) working pressure
- Highly flexible & elastic
- Complete with Nitto style fittings
- Temperature operating range of -40°C to +80°C
- These hybrid polymer flexible compressed air hose assemblies come with Nitto style fittings for one touch quick release



\$31³⁰

HA1020 ALEMLUBE COMPRESSED AIR HOSE ASSEMBLY

- 3/8" x 20m long hose
- 300psi (20bar) working pressure
- Highly flexible & elastic
- Complete with Nitto style fittings
- Temperature operating range of -40°C to +80°C
- These hybrid polymer flexible compressed air hose assemblies come with Nitto style fittings for one touch quick release



\$37⁸⁰

50027 ALEMLUBE INDUSTRIAL BLOW GUN 27CM NOZZLE

- 16bar maximum
- The inlets are made from hard-wearing Acetal Plastic that's harder than brass
- These blow guns combine maximum airflow with a low level of noise providing good functional properties, operational reliability & long life
- Ergonomically correct design, efficient operation whilst being durable & strong



\$14⁰⁰

FUEL YOUR PRODUCTIVITY

SELF BUNDED DIESEL FUEL TANKS FOR ONSITE REFUELLING

AQB1000-2

ALEMQUBE SELF BUNDED 1,000L DIESEL FUEL TANK WITH EQUIPMENT BAY



- Self banded design is a double-walled construction that prevents leaks & eliminates the need for costly external bunding
- Tank dimensions are 1,394mm (W) x 1,270mm (H) x 1,100mm (D)
- Pump and metering equipment bay is 460mm (L) x 338mm (W) x 380mm (H)
- Tank capacity of 1,000L SFL
- Tank weight of 640kg
- Durable and weather resistant
- Australian Standards compliant
- With 12V/24V pump mounted in equipment bay - B.Smart Supreme



\$7,410⁰⁰

AQB2000-1

ALEMQUBE SELF BUNDED 2,000L DIESEL FUEL TANK WITH EQUIPMENT BAY



- Self banded design is a double-walled construction that prevents leaks & eliminates the need for costly external bunding
- Tank dimensions are 2,294mm (W) x 1,270mm (H) x 1,142mm (D)
- Pump and metering equipment bay is 460mm (L) x 338mm (W) x 380mm (H)
- Tank capacity of 2,000L SFL
- Tank weight of 950kg
- With 12V/24V pump mounted in equipment bay - non managed



\$9,530⁰⁰

AQ4000-3

ALEMQUBE SELF BUNDED 4,000L DIESEL FUEL TANK



- Self banded design is a double-walled construction that prevents leaks & eliminates the need for costly external bunding
- Tank dimensions are 2,268mm (W) x 1,270mm (H) x 2,058mm (D)
- Tank capacity of 4,000L SFL
- Tank weight of 1,304kg
- Also suitable for oil
- Meets AS1940-2017, UL142 & AS1692 regulations
- With 240V non managed bowser (cube 70)




\$13,115⁰⁰

AQ5000-2

ALEMQUBE SELF BUNDED 5,000L DIESEL FUEL TANK



- Self banded design is a double-walled construction that prevents leaks & eliminates the need for costly external bunding
- Tank dimensions are 2,460mm (W) x 1,270mm (H) x 2,268mm (D)
- Tank capacity of 5,000L SFL
- Tank weight of 1,460kg
- Lifting lugs assists in moving the tank from site to site
- With basic 12V pump with mechanical flow meter

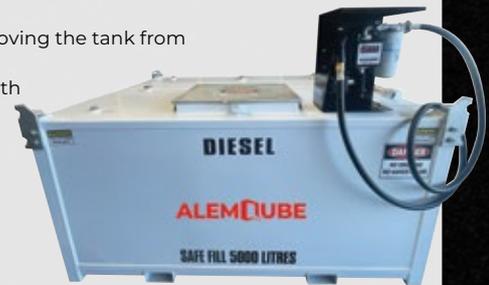

\$13,980⁰⁰



Stores advertised on page one of this catalogue are independent businesses. Every effort has been made to ensure that advertised stock is available, but due to factors beyond the control of AlemLube NZ Ltd not all products advertised in this catalogue are available at all stores. Pricing for the products are special prices available through to 30 June 2026. Regular prices vary from store to store. The catalogue pricing is calculated in good faith as the average regular price at the time of preparation. AlemLube NZ Ltd will do everything possible, within reason, to maintain stocks of advertised products but cannot be responsible for unforeseen shortfalls beyond their control.

All products are covered by a 2 year warranty (unless otherwise stated) and with the aid of our sixty five strong nationwide Authorised Agent Network, technical support for all AlemLube products featured in this catalogue will never be far away. E.&O.E. Copyright 2026. Reproduction in whole or part is prohibited without written approval. All prices shown exclusive of GST. Freight charges may be applicable and may vary from region to region.